

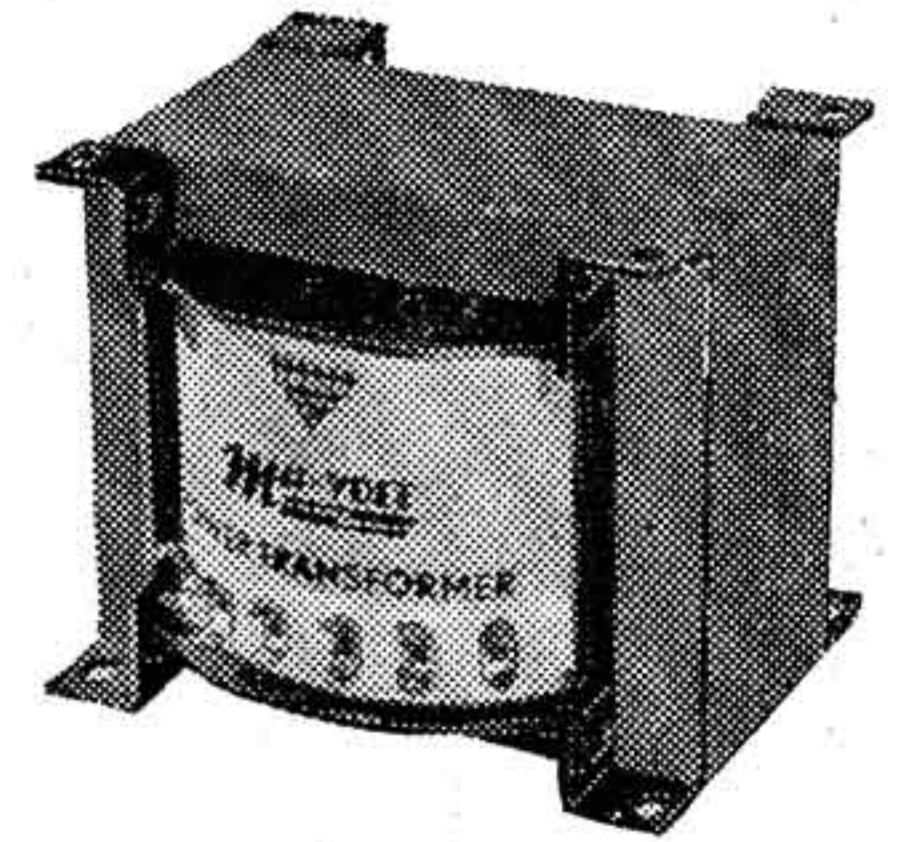


VOEDINGSTRAFO'S „MU-VOLT”

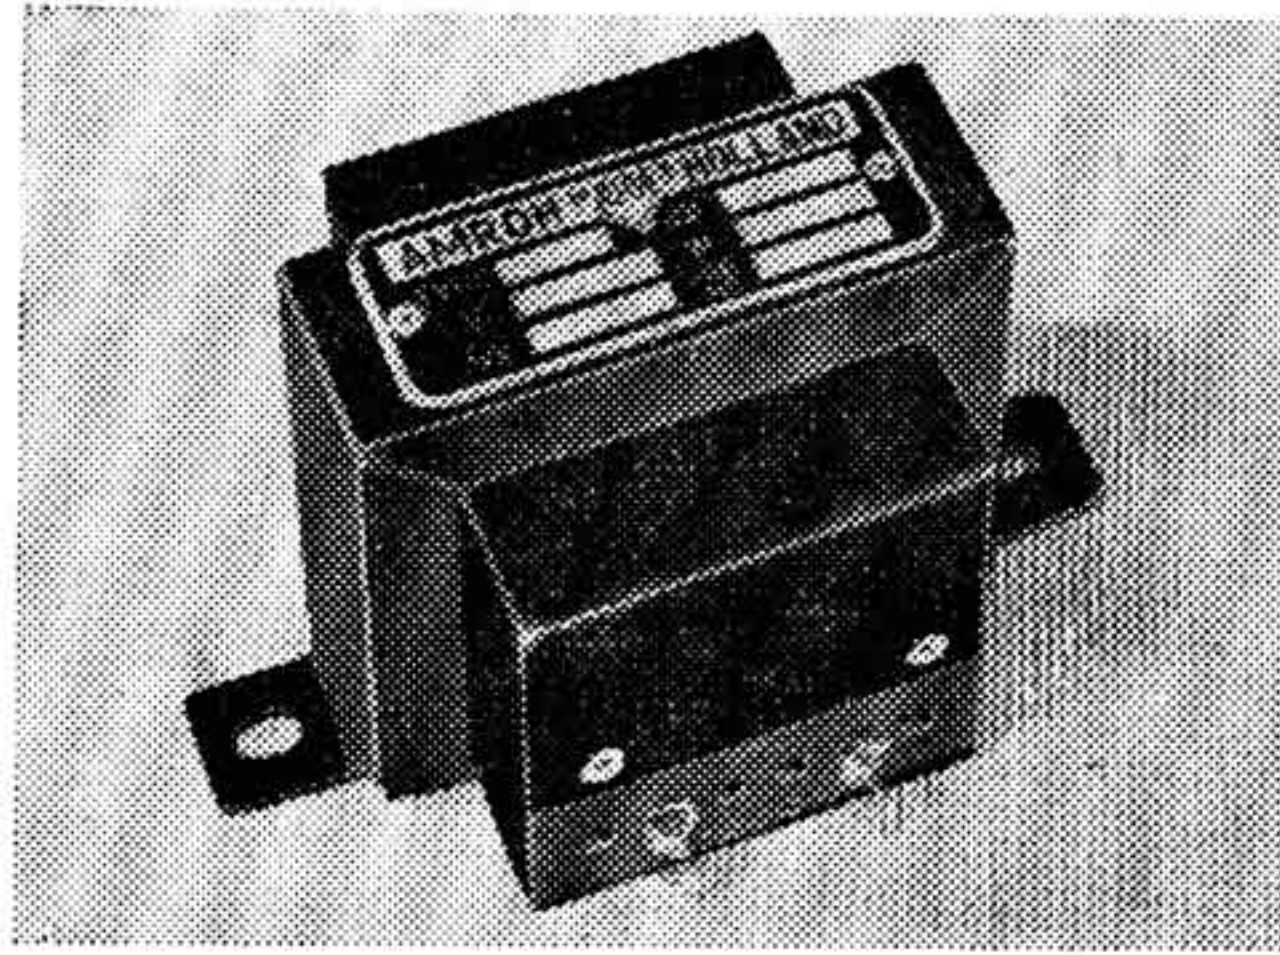

P130 ST	2 x 295 V.	150 mA			
	3 x 3.15 V.	3.5 A.	4-5 V.	3 A.	f 28.75
P141	2 x 280 V.	100 mA			
	2 x 3.15 V.	3 A.	0-4 V.	1 A.	f 25.50
P200	2 x 250/280 V.	250 mA.			
	0-6-3 V.	4.5 A.	0-4-5 V.	3 A.	f 54.—
P120D	2 x 270 V.	60 mA.			
	0-4-6-3 V.	3 A.	0-4-5 V.	1 A.	f 14.95
PC100	Sec. 220-250 V.	60 mA.			
	2 x 3.15 V.	2.5 A.			f 13.95

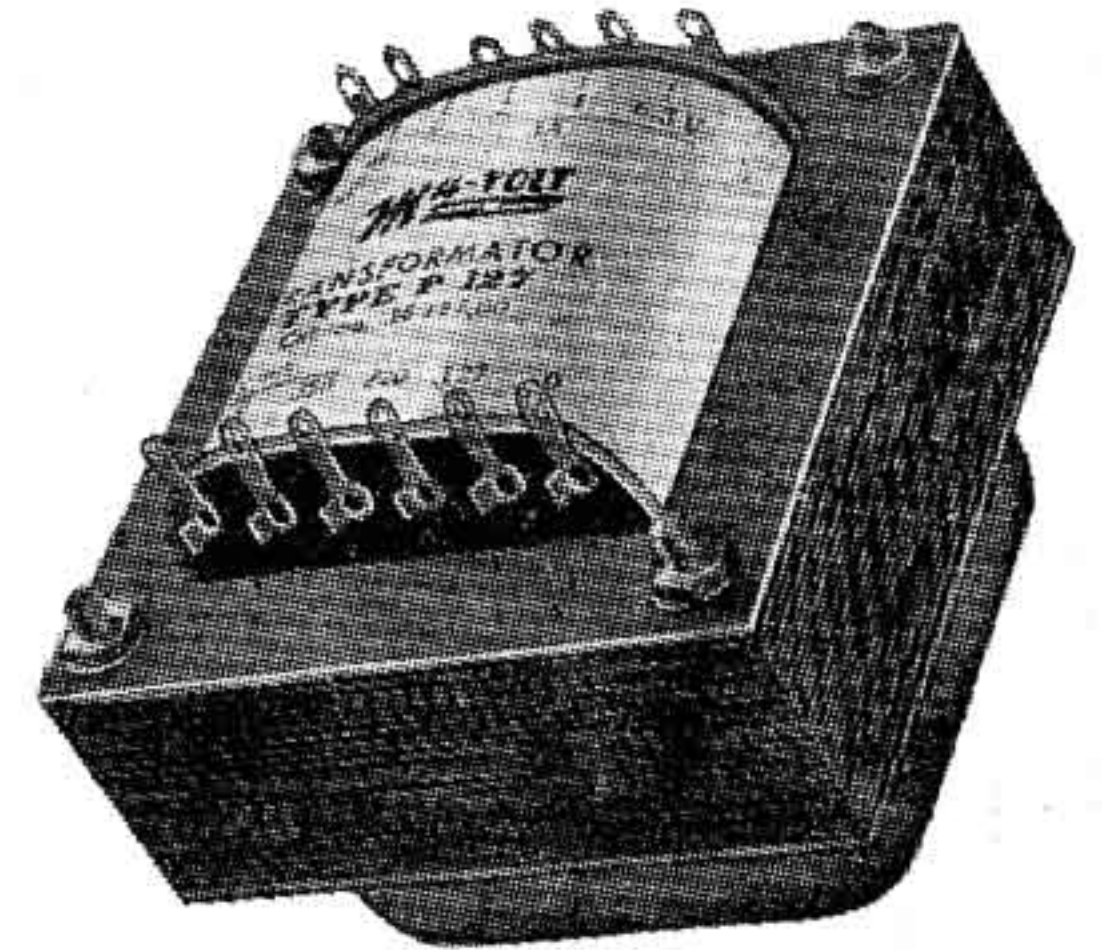

SMOORSPOELEN „MU-VOLT”




6010	60 mA.	10 H		f 4.50
1006	100 mA.	6 H		f 6.25
1505	150 mA.	5 H		f 3.75
6006	60 mA.	6 T		f 3.—
S200	200 mA.			f 24.—
F4	H.f. smoorspoel	104 MH		f 2.25
F6	H.f. smoorspoel	1 micro H		
			p. zakje à 3 stuks	f 1.25



UITGANGSTRAFO'S

U72	Pr 5200/7000 Ohm	Sec. 2.5 - 3.25 - 5 Ohm	f 14.50
U85N	Pr 7000 Ohm	Sec. 3-5-8 Ohm	f 5.95
3535	Pr 3500 Ohm	Sec. 5 Ohm. Muvolett	f 3.75
7043	Pr 7000 Ohm	Sec. 3 Ohm. Muvolett	f 3.75
7045	Pr 7000 Ohm	Sec. 5 Ohm. Muvolett	f 3.75
22043/5	Pr 18.000-25.000 Ohm	Sec. 3-5 Ohm. Muvolett	f 3.95
L1	Lijntrafo. 10.000 Hz.	2 wB. 12 Wt. 100 V.	f 12.50
	Trafo voor „Golden Wharfedale”	luidspreker	f 23.80

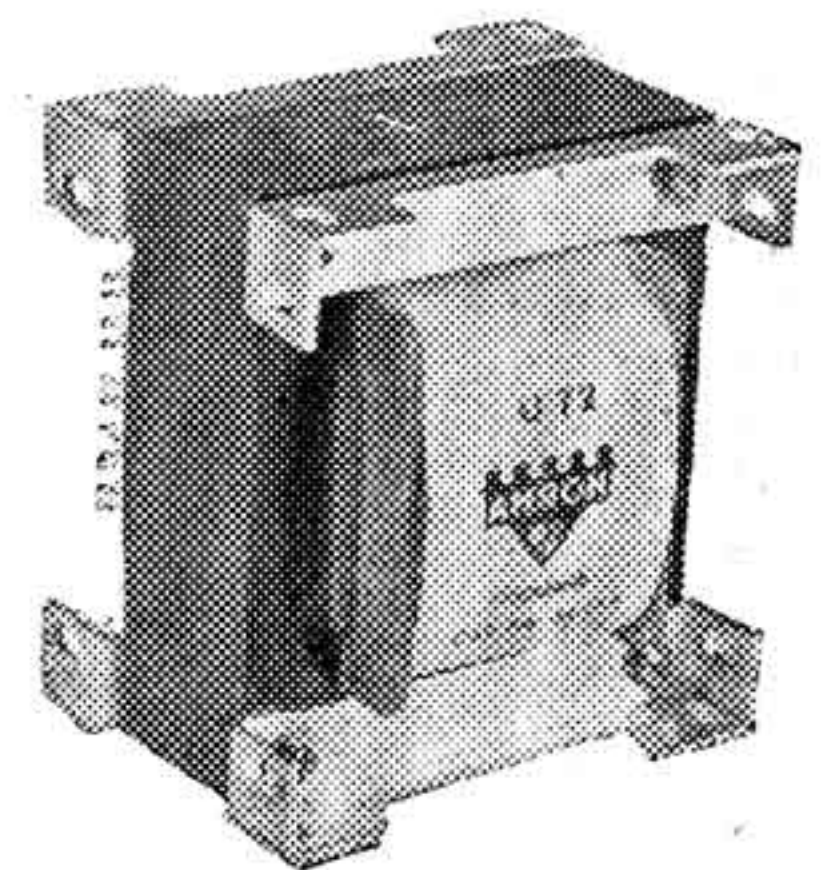

MU-ZED UITGANGSTRAFO'S

BI-42	Balans ingangstrafo	f 9.25
U80K	Universele uitgang in kapsel Pr. 216-29.000 Ohm Sec. 2-2.75-3.2-5-7-8-12 Ohm.	f 12.50
U71S	Idem ongecapseld	f 9.50
U81S	Universele „Batterij” Pr. 11000-36000 Ohm. Sec. 2.2-3.5-4-6 Ohm	f 8.70
U70B	Kwaliteits balans uitgang Pr. 5000-7000-10.000 Ohm. Sec. 2.5-3.5-7-10-14-500 Ohm. 20 Watt	f 33.75
U200	Balans uitgang voor „W.W.” weergave. Pr. 5000-10.000 Ohm. Sec. 1-30 Ohm. Universeel	f 62.50
U120	Aanpassingen als U70B 50 Watt	f 62.50

